



PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

| | | |
|--|-----------|--|
| (51) International Patent Classification ⁷: G02F 1/1343, 1/133 | A1 | (11) International Publication Number: WO 00/05621 (43) International Publication Date: 3 February 2000 (03.02.00) |
| (21) International Application Number: PCT/EP99/04758 (22) International Filing Date: 7 July 1999 (07.07.99) (30) Priority Data: 09/120,511 22 July 1998 (22.07.98) US (71) Applicant: KONINKLIJKE PHILIPS ELECTRONICS N.V. [NL/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL). (72) Inventors: JOHNSON, Mark, T.; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL). VAN DER PUT, Adrianus, A.; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL). CNOSSEN, Gerard; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL). BUCHEL, Michael; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL). DEEBEN, Josephus, P., A.; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL). MARSHALL, Thomas; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL). HABERERN, Kevin, W.; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL). (74) Agent: RAAP, Adriaan, Y.; Internationaal Octrooibureau B.V., Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL). | | (81) Designated States: CN, JP, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published <i>With international search report.</i> |
| (54) Title: DISPLAY DEVICE <div data-bbox="354 1152 1299 1709" data-label="Diagram"> </div> (57) Abstract <p>In a display device comprising a first substrate having at least one transparent, first picture electrode of a first material, a second substrate comprising at least one second picture electrode of a second material which, jointly with the picture electrode on the first substrate and an intermediate opto-electronic material, defines a pixel, and means for supplying electric voltages to the picture electrodes, the work function between the two picture electrodes is decreased in that at least one of the picture electrodes is coated with at least one layer of conducting material, or a layer of a material comprising a dipole.</p> | | |

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

| | | | | | | | |
|----|--------------------------|----|--|----|--|----|--------------------------|
| AL | Albania | ES | Spain | LS | Lesotho | SI | Slovenia |
| AM | Armenia | FI | Finland | LT | Lithuania | SK | Slovakia |
| AT | Austria | FR | France | LU | Luxembourg | SN | Senegal |
| AU | Australia | GA | Gabon | LV | Latvia | SZ | Swaziland |
| AZ | Azerbaijan | GB | United Kingdom | MC | Monaco | TD | Chad |
| BA | Bosnia and Herzegovina | GE | Georgia | MD | Republic of Moldova | TG | Togo |
| BB | Barbados | GH | Ghana | MG | Madagascar | TJ | Tajikistan |
| BE | Belgium | GN | Guinea | MK | The former Yugoslav Republic of Macedonia | TM | Turkmenistan |
| BF | Burkina Faso | GR | Greece | | | TR | Turkey |
| BG | Bulgaria | HU | Hungary | ML | Mali | TT | Trinidad and Tobago |
| BJ | Benin | IE | Ireland | MN | Mongolia | UA | Ukraine |
| BR | Brazil | IL | Israel | MR | Mauritania | UG | Uganda |
| BY | Belarus | IS | Iceland | MW | Malawi | US | United States of America |
| CA | Canada | IT | Italy | MX | Mexico | UZ | Uzbekistan |
| CF | Central African Republic | JP | Japan | NE | Niger | VN | Viet Nam |
| CG | Congo | KE | Kenya | NL | Netherlands | YU | Yugoslavia |
| CH | Switzerland | KG | Kyrgyzstan | NO | Norway | ZW | Zimbabwe |
| CI | Côte d'Ivoire | KP | Democratic People's Republic of Korea | NZ | New Zealand | | |
| CM | Cameroon | | | PL | Poland | | |
| CN | China | KR | Republic of Korea | PT | Portugal | | |
| CU | Cuba | KZ | Kazakstan | RO | Romania | | |
| CZ | Czech Republic | LC | Saint Lucia | RU | Russian Federation | | |
| DE | Germany | LI | Liechtenstein | SD | Sudan | | |
| DK | Denmark | LK | Sri Lanka | SE | Sweden | | |
| EE | Estonia | LR | Liberia | SG | Singapore | | |

Display device.

The invention relates to a display device comprising a first substrate having at least one transparent, first picture electrode of a first material, a second substrate having at least one second picture electrode of a second material which, jointly with the picture electrode on the first substrate and an intermediate opto-electronic material, defines a pixel, and means for supplying electric voltages to the picture electrodes.

The invention also relates to a display device comprising a first substrate having at least one transparent, first picture electrode of a first material, a second substrate having a channel plate coated with a dielectric layer, in which a channel provided with channel electrodes, jointly with the picture electrode on the first substrate and an intermediate opto-electronic material, defines a pixel, and means for driving the pixel.

Display devices of this type are generally known and usually comprise a large number of pixels. The first type comprises, for example, LCDs, both of the active and the passive type; the second type comprises plasma-addressed liquid crystal display devices referred to as PALC displays.

Notably when the second picture electrode is reflective, the drive of these display devices appears to be sensitive to the alternating supply of positive and negative voltages across the pixels. This becomes manifest as, for example, flicker. In a picture period, in which a positive voltage is written, the same picture information leads to a different voltage across the pixel than in the subsequent picture period in which a negative voltage is written. At a frame frequency of, for example 60 Hz, this leads to a flicker frequency of 30 Hz, which is clearly noticeable in the picture. The display devices also often suffer from image retention. In this application, reflecting picture electrodes are also understood to mean partially reflecting, semitransparent electrodes as are used in transfective display devices.

It is an object of the invention to partly or entirely obviate one or more of said problems.

A first embodiment of a display device according to the invention is therefore characterized in that at least one of the picture electrodes is coated with at least one metal

layer, such that the difference in work function between the two picture electrodes is decreased.

5 A second embodiment of a display device according to the invention is characterized in that at least one of the picture electrodes is coated with at least one layer of a material comprising a dipole, such that the difference in work function between the two picture electrodes is decreased.

10 The embodiment of a display device according to the invention, based on plasma addressing, is characterized in that the picture electrode, the dielectric layer or at least one channel electrode is coated with at least one layer of material modifying the work function.

The invention is based on the recognition that said image-disturbing phenomena (flicker) result from an initial internal DC voltage across the electro-optical layer. In its turn, this voltage gives rise to ion movements which lead to image retention or cause said transient effect.

15 Said voltage is presumably the result of the difference in work function between the materials of the two picture electrodes, for example ITO for the transparent picture electrode and aluminum for the reflective picture electrode. Such an asymmetrical structure thus leads to an internal DC voltage which, according to the invention, is neutralized by coating one of the picture electrodes with a layer of conducting material or a layer of material
20 comprising a dipole, for example, an organic material having a low electric conductance, such that the difference in work function between the two picture electrodes is decreased. Experiments have proved that the difference in work function, dependent on the materials used, can be reduced to less than 0.25 V.

25 Since also PALC display devices have an asymmetrical structure (a liquid crystal layer between a microsheet and an electrode) there is also such an internal DC voltage in this case which, according to the invention, is neutralized by coating the picture electrodes, the microsheet or the channel electrodes with at least one layer of material modifying the work function of the material of said picture electrodes, microsheet, or channel electrodes.

30 The difference in work function may be decreased in different ways, for example, by coating the transparent picture electrode with a layer comprising at least a thin layer of the material of the reflecting picture electrode, or by coating the reflecting picture electrode with a layer comprising at least a layer of conducting material having substantially the same work function as that of the transparent picture electrode. An example of the latter case is the use of a thin layer of gold on a silicon wafer on which, for example, reflecting

aluminum electrodes are realized, while switching elements (transistors) are realized in the subjacent silicon. If the gold is several monolayers thick, there is hardly any lateral conductance and this layer does not need to be split up into separate pixels.

5 The reflecting picture electrode as well as the transparent picture electrode may be coated with a layer comprising at least a layer of the same conducting material.

Also when using (organic) material with a dipole, which is preferably chosen from the group of polyimides or polyamide acids comprising or not comprising fluorine, the reflecting picture electrode and the transparent picture electrode may be coated with a layer comprising at least a layer of the same (organic) material with a dipole, the material on one of
10 the two picture electrodes having been subjected to, for example, an UV treatment when these electrodes are coated with a layer comprising at least a layer of the same (organic) material with a dipole. In this application a material having a dipole is considered to be a material having spontaneous polarisation.

15 If desired, the layer of material with a dipole may function as a orientation layer.

These and other aspects of the invention are apparent from and will be elucidated with reference to the embodiments described hereinafter.

20 In the drawings:

Fig. 1 is a cross-section of a part of a display device according to the invention, Figs. 2, 3, 4, and 5 are variants of Fig. 1.

The Figures are diagrammatic and not to scale. Corresponding components generally have the same reference numerals.

25

Fig. 1 is a cross-section of a part of a display device comprising an electro-optical display cell, in this example a liquid crystal cell 1 with a twisted nematic liquid crystal material 2 present between a first transparent substrate 3 of, for example, glass comprising an
30 electrode 5, and a second substrate 4. The electrode 5 is made of a light-transmissive material, for example indium tin oxide (ITO). The second substrate 4 comprises electrodes 6 of a reflecting or diffuse reflecting material such as, for example aluminum. The second substrate 4 is opaque in this example and may consist of various materials, for example, a silicon wafer in which switching elements are integrated.

Different electro-optical effects may be used, particularly liquid crystal effects such as (S)TN, guest-host, PDLC, ferro-electrics, VAN, reflective OCB, HAN. Dependent on the effect used, the device comprises a polarizer 7. In this example, the device also comprises orientation layers 8, 9 which orient the liquid crystal material on the inner walls of the substrates, such that the cell has a twist angle of approximately 90° in this example. The display device comprises drive means for supplying drive voltages to the electrodes 5, 6. These drive means are diagrammatically indicated by means of the switch 10 and a voltage source 21 in Fig. 1. In this first example, the ITO layer 5 is coated with a second metal layer 12 of aluminum.

The work function, both with and without the metal layer 12, was measured of the first substrate 3 coated with an ITO layer 5 and an orientation layer 8. For such a measurement (the Kelvin method), a vibrating gold plate is placed opposite the substrate at a small distance (0.1 mm), while an electric voltage is supplied between the plate and the ITO electrode. The vibration of the plate causes a changing capacitance, which gives rise to a current which is eliminated by means of a counter voltage which is a measure of the work function. Similarly, the work function was measured of the second substrate 4 coated with an aluminum pattern 6 and an orientation layer 9. Due to the presence of the metal layer 12, the difference in work function of the substrates 3, 4 had decreased considerably.

Subsequently, the flicker was measured of the finished cell filled with liquid crystal material. This can be done optically by applying a square-wave voltage with an identical positive and negative amplitude across a pixel, by measuring the flicker (for example, by means of an exposure meter) and by giving such an offset that the flicker is substantially invisible. Another method is purely electrical but only suitable for active drive. In this method, the voltage variation during non-selection across a pixel is fixed by means of sample-and-hold circuits. Voltage differences which occur during a negative and a subsequent positive field or frame are mutually compared whereafter, if necessary, an offset voltage is introduced to eliminate the voltage differences. It was found that the required offset voltage for avoiding flicker had substantially the same value as the difference in work function of the substrates 3, 4. By minimizing this difference, in this case by providing the aluminum layer 12, the internal DC voltage (and hence flicker, but also image retention and said transient phenomena) are thus reduced considerably.

With a view to transparency, the aluminum should not be too thick (several monolayers). However, thin layers of aluminum tend to react with the ITO while forming

aluminum oxide. This has a different work function and, moreover, the conductance is reduced.

The metal layer 12 shown in Fig. 1 is replaced in another example by (or, if necessary, coated with) a metal layer whose material has a substantially identical work function such as, for example, molybdenum, chromium, tungsten, silver or gold, if the metal layer 12 consists of aluminum.

The transparent conductor 5 may be alternatively manufactured from a different material than ITO but with a substantially identical work function, such as $\text{SnO}/\text{In}_2\text{O}_3$ or polyaniline.

In yet another example, the metal layer 12 consists of a thin double layer. The ITO is coated with a thin layer of a metal which does not react with ITO such as, for example, molybdenum, chromium, tungsten or titanium, which layer in its turn is coated with a thin layer of aluminum.

A further possibility is shown in Fig. 2, in which the difference in work function of the substrate 3, 4 has decreased considerably by coating both the aluminum electrode 6 and the ITO electrode 5 with a layer 12 of the same metal. This metal is chosen from material which preferably does not react with ITO, for example, from the group of molybdenum, copper, tungsten and titanium; double layers are alternatively possible. The layer on the ITO must of course be thin enough to pass light.

In the device of Fig. 3, a silicon wafer is used for the substrate 4, in which switching elements energizing the switching electrodes 6 are realized. The switching electrodes are mutually separated, while the entire wafer is coated with a metal layer 14 of gold which is only several monolayers thick. By coating the surface with gold, the reflectivity is hardly influenced. Besides, the layer is so thin that no or hardly any lateral conductance occurs; the voltage across an electrode 6 is thus entirely determined by a subjacent switching element. Gold has substantially the same work function as ITO so that a symmetric reflective display cell is obtained which may be used notably in projection applications. Here again, the DC offset voltage was reduced from 0.8 V to values below 0.25 V.

Fig. 4 is a cross-section of a part of a display device comprising an electro-optical display cell, in this example a liquid crystal cell 1 with a twisted nematic liquid crystal material 2 which is present between a first transparent substrate 3 of, for example glass comprising an electrode 5, and a second substrate 4 comprising an electrode 6. The electrodes are coated on at least one substrate with layers 18, 19 of an organic material increasing or decreasing the work function (for example, hydrocarbons comprising or not comprising

fluorine). These materials have a small conductance and comprise an internal dipole. If desired, the layers 18, 19 are coated with layers 8, 9 of orienting material. If a polyamide acid material, a precursor polyimide, a material comprising fluorine, or (preferably) a polyamide acid material comprising fluorine is chosen, the work function of the aluminum is increased to approximately that of the ITO. An example is a polyimide of pyromellitic dianhydride and 2.2-bis[4-(4-aminophenoxy)phenyl]-hexafluoropropane.

A layer 18 of polyethyleneimine decreases the work function of the ITO. Both substrates may of course be coated with the same material comprising a dipole and multilayer structures are alternatively possible. The layers comprising the dipole are obtained in that compounds which constitute a permanent dipole in combination with the electrode material are used for the manufacture of said layers.

If necessary, the difference in work function is even further decreased by subjecting the display device, or at least one of the two substrates, to an UV treatment. Generally, this slightly decreases the work function of ITO.

The invention is of course not limited to the examples shown. For example, in Fig. 4, the layers 18, 19 may be made of a material which is suitable as an orientation material for the liquid crystal material. The layers 8, 9 can then be dispensed with. The substrate 4 may also constitute, for example a channel plate for a display device of the Plasma-Addressed Liquid Crystal type (PALC). In that case, as shown in Fig. 6, the electrodes 6 are dispensed with and the substrate 4 is provided with elongated plasma ducts 16, covered by a microsheet 15. The DC offset voltage is decreased by coating the electrode 5 on the transparent substrate 3, the microsheet 15 or one or both electrodes 17 in the channels 16 with a layer 20 modifying their work function. (Dependent on its position in the device (either on electrode 5, on the microsheet or on a channel electrode) a material either decreasing or increasing the work function is chosen.) Combinations are alternatively possible.

As has been stated, the electrodes 6 may be transparent or have, for example a pattern of apertures for transfective display devices.

CLAIMS:

1. A display device comprising a first substrate having at least one transparent, first picture electrode of a first material, a second substrate comprising at least one second picture electrode of a second material which, jointly with the picture electrode on the first substrate and an intermediate opto-electronic material, defines a pixel, and means for
5 supplying electric voltages to the picture electrodes, characterized in that at least one of the picture electrodes is coated with at least one metal layer, such that the difference in work function between the two picture electrodes is decreased.
2. A display device comprising a first substrate having at least one transparent,
10 first picture electrode of a first material, a second substrate having at least one second picture electrode of a second material which, jointly with the picture electrode on the first substrate and an intermediate opto-electronic material, defines a pixel, and means for supplying electric voltages to the picture electrodes, characterized in that at least one of the picture electrodes is coated with at least one layer of a material comprising a dipole, such that the difference in
15 work function between the two picture electrodes is decreased.
3. A display device as claimed in claim 1 or 2, characterized in that the second picture electrode is reflective.
- 20 4. A display device as claimed in claim 1 or 2, characterized in that at least one of the picture electrodes is coated with at least a layer of conducting material and at least a layer of a material comprising a dipole.
5. A display device as claimed in claim 1, 2 or 4, characterized in that the
25 difference in work function between the two picture electrodes is at most 0.25 V.
6. A display device as claimed in claim 1, 2 or 4, characterized in that the first picture electrode is coated with a layer comprising at least a thin layer of the material of the second picture electrode.

7. A display device as claimed in claim 1, 2 or 4, characterized in that the second picture electrode is coated with a layer comprising at least a layer of conducting material having substantially the same work function as that of the first picture electrode.
- 5
8. A display device as claimed in claim 1, 2 or 4, characterized in that the first picture electrode and the second picture electrode are coated with a layer comprising at least a layer of the same conducting material.
- 10 9. A display device as claimed in claim 2 or 4, characterized in that the material comprising a dipole is chosen from the group of polyimides and polyamide acids.
10. A display device as claimed in claim 9, characterized in that the material having a dipole comprises fluorine-containing polyimides or polyamide acids.
- 15
11. A display device as claimed in claim 2 or 4, characterized in that the first picture electrode and the second picture electrode are coated with a layer comprising at least a layer of the same material having a dipole.
- 20 12. A display device as claimed in claim 2 or 4, characterized in that the first picture electrode and the second picture electrode are each coated with a layer comprising a layer of different materials having a dipole.
13. A display device as claimed in claim 2 or 4, characterized in that the first
- 25 picture electrode and the second picture electrode are coated with a layer comprising at least a layer of the same material having a dipole, the material on one of the two picture electrodes being subjected to an UV treatment.
14. A display device comprising a first substrate having at least one transparent,
- 30 first picture electrode of a first material, a second substrate having a channel plate coated with a dielectric layer, in which a channel provided with channel electrodes, jointly with the picture electrode on the first substrate and an intermediate opto-electronic material, defines a pixel, and means for driving the pixel, characterized in that the picture electrode, the dielectric layer

or at least one channel electrode is coated with at least one layer of material modifying the work function of the material of said picture electrode, dielectric layer, or channel electrode.

1/3

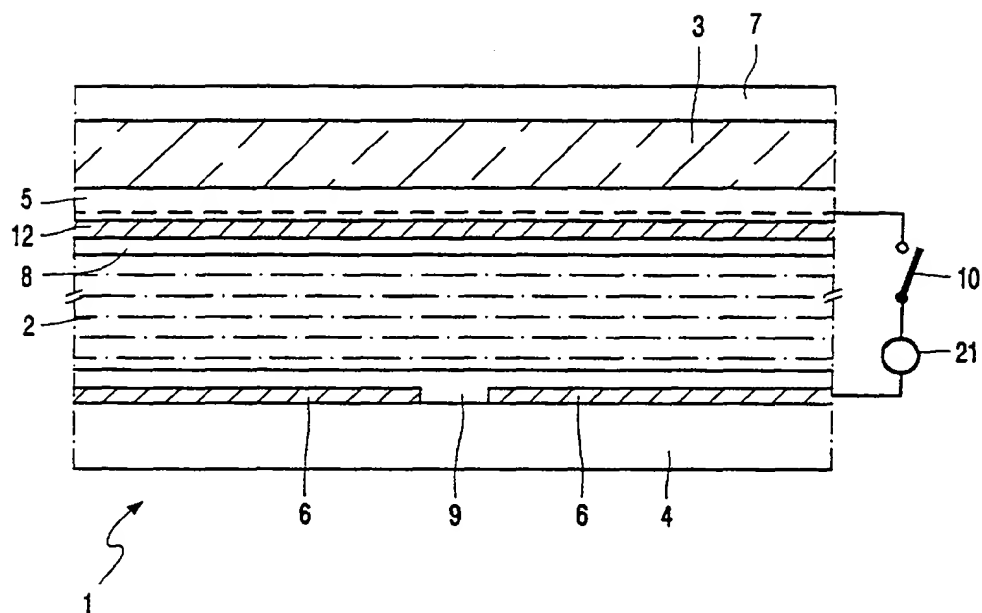


FIG. 1

2/3

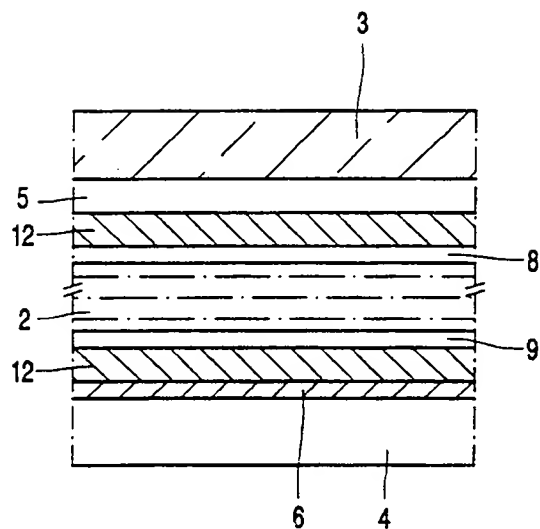


FIG. 2

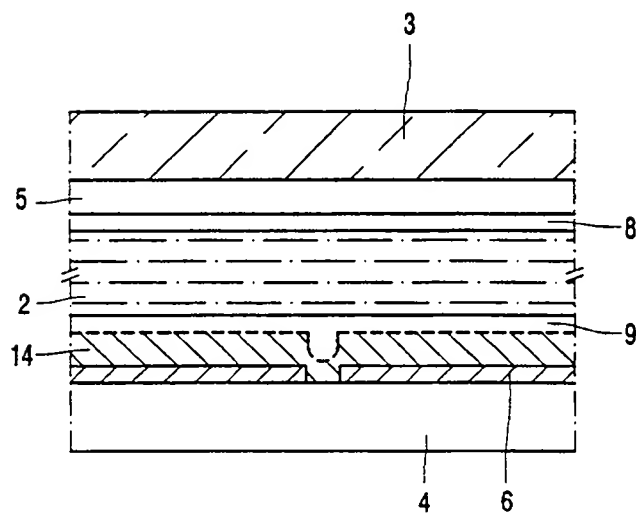


FIG. 3

3/3

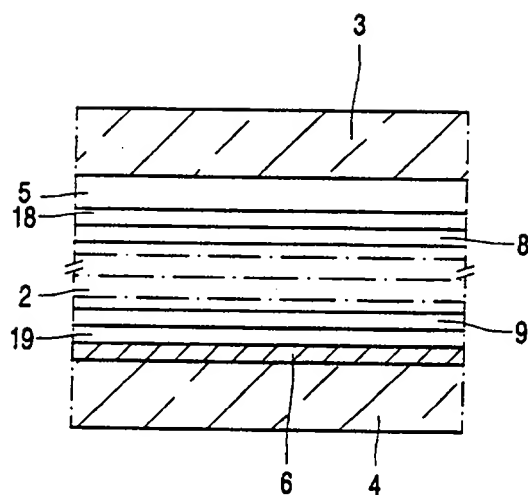


FIG. 4

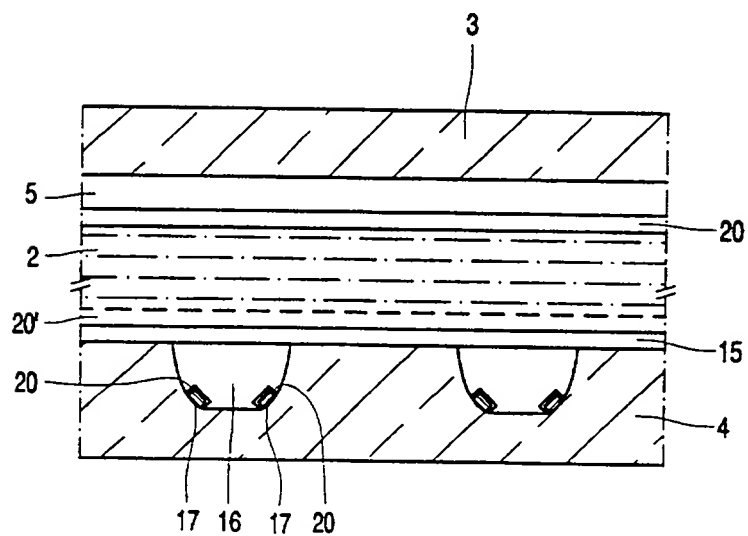


FIG. 5

INTERNATIONAL SEARCH REPORT

International Application No
PCT/EP 99/04758

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 G02F1/1343 G02F1/133

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 7 G02F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

| Category * | Citation of document, with indication, where appropriate, of the relevant passages | Relevant to claim No. |
|------------|--|-----------------------|
| A | US 5 764 324 A (LU MINHUA ET AL) 9 June 1998 (1998-06-09) column 1, line 66 - column 2, line 63 column 5, line 38 - column 6, line 15; figure 5 | 1,3,5,7 |
| A | --- PATENT ABSTRACTS OF JAPAN vol. 013, no. 116 (P-845), 22 March 1989 (1989-03-22) & JP 63 289533 A (OKI ELECTRIC IND CO LTD), 28 November 1988 (1988-11-28) abstract | 1 |
| A | --- US 5 739 547 A (ENDOY YOSHIHIRO ET AL) 14 April 1998 (1998-04-14) column 4, line 12 - line 53 column 6, line 42 - line 56; figure 2 --- -/-- | 1,2 |

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *&* document member of the same patent family

Date of the actual completion of the international search

13 October 1999

Date of mailing of the international search report

20/10/1999

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Stang, I

INTERNATIONAL SEARCH REPORT

Int. .onal Application No
PCT/EP 99/04758

| C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT | | |
|--|---|-----------------------|
| Category * | Citation of document, with indication, where appropriate, of the relevant passages | Relevant to claim No. |
| A | PATENT ABSTRACTS OF JAPAN vol. 012, no. 307 (P-747), 22 August 1988 (1988-08-22) & JP 63 077024 A (MATSUSHITA ELECTRIC IND CO LTD), 7 April 1988 (1988-04-07) abstract | 2,4,9,11 |
| A | PATENT ABSTRACTS OF JAPAN vol. 018, no. 187 (P-1720), 30 March 1994 (1994-03-30) & JP 05 346585 A (CANON INC), 27 December 1993 (1993-12-27) abstract | 2,4,5, 9-11 |
| A | EP 0 848 408 A (TEKTRONIX INC) 17 June 1998 (1998-06-17) column 7, line 16 -column 8, line 8; figures 2,3 | 14 |
| A | WO 96 19750 A (PHILIPS ELECTRONICS NV ;PHILIPS NORDEN AB (SE); TEKTRONIX INC (US)) 27 June 1996 (1996-06-27) page 5, line 7 -page 6, line 14; figure 3 | 14 |

Form PCT/ISA/210 (continuation of second sheet) (July 1992)

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP 99/04758

| Patent document cited in search report | | Publication date | Patent family member(s) | Publication date |
|---|---|---------------------|----------------------------|---------------------|
| US 5764324 | A | 09-06-1998 | JP 10206845 A | 07-08-1998 |
| JP 63289533 | A | 28-11-1988 | NONE | |
| US 5739547 | A | 14-04-1998 | JP 8201854 A | 09-08-1996 |
| JP 63077024 | A | 07-04-1988 | NONE | |
| JP 05346585 | A | 27-12-1993 | JP 2704814 B | 26-01-1998 |
| | | | DE 69217154 D | 13-03-1997 |
| | | | DE 69217154 T | 19-06-1997 |
| | | | EP 0539992 A | 05-05-1993 |
| | | | US 5325219 A | 28-06-1994 |
| EP 0848408 | A | 17-06-1998 | CN 1197264 A | 28-10-1998 |
| | | | JP 10186336 A | 14-07-1998 |
| WO 9619750 | A | 27-06-1996 | US 5705886 A | 06-01-1998 |
| | | | EP 0746796 A | 11-12-1996 |
| | | | JP 9509760 T | 30-09-1997 |